


4

3



2



1

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
1		NEW DRAWING	02MAR222	GSK RS

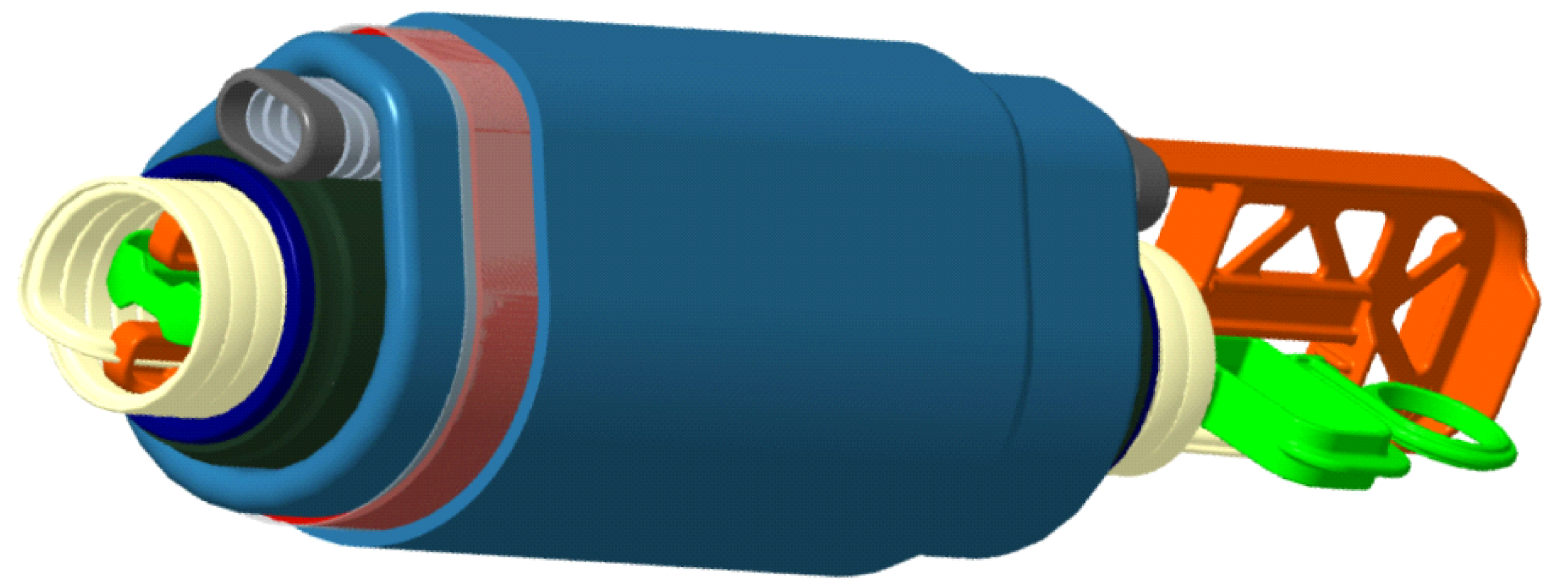

PART NUMBER	DESCRIPTION
EN2949-000	CSJU-2511
EN2950-000	CSJU-1511-SB2
EN2951-000	CSJU-1511-SB1
EN2952-000	CSJU-2511-SB1
EN2953-000	CSJU-2511-SB2
EN2968-000	CSJU-S-1511-SB2
EN2969-000	CSJU-S-1511-SB1
EN2970-000	CSJU-S-2511-SB1
EN2975-000	CSJU-S-2511-SB2
EN2976-000	CSJU-S-2511
EN5196-000	CSJU-1511-ALC2
EN5315-000	CSJU-2511-ALC2
EN6509-000	CSJU-1511-SB2-GC2

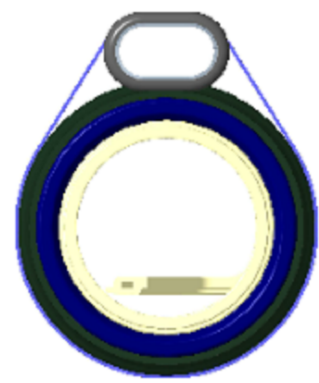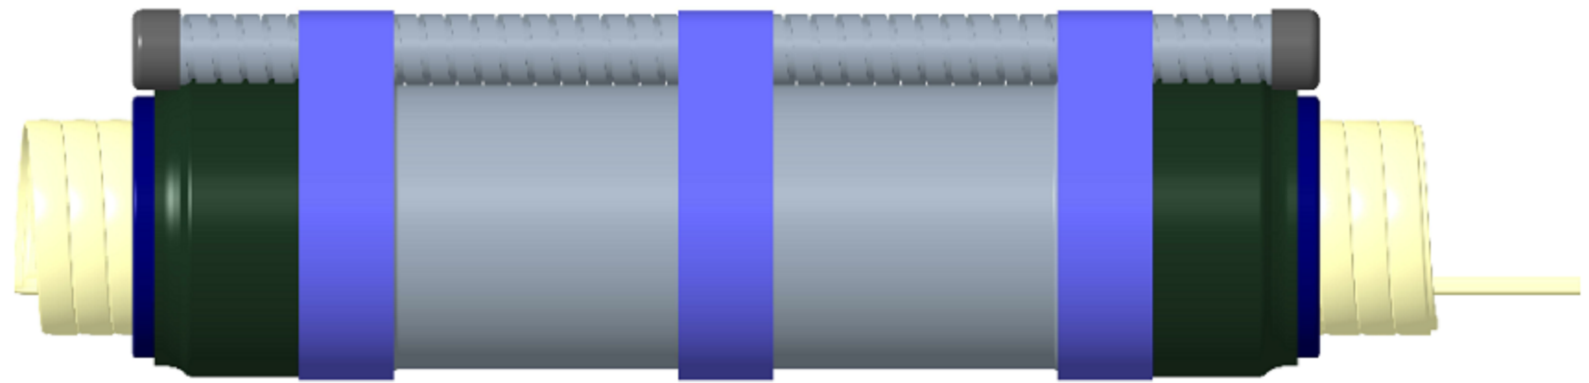

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 02MAR2022 SATHISH KUMAR G	 TE Connectivity Ltd.
DIMENSIONS: INCHES [mm]		CHK 02MAR2022 RAMÓN SÁNCHEZ	
		APVD 02MAR2022 RAMÓN SÁNCHEZ	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	NAME CSJU Cold Applied Joint CSJU-FINAL ASSEMBLY (SIZE: 12 mm)
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
MATERIAL	FINISH	WEIGHT	A3 00779 C-0147-CSJU
		CUSTOMER DRAWING	SCALE NTS SHEET 1 of 3 REV 1

4


3

2

1

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

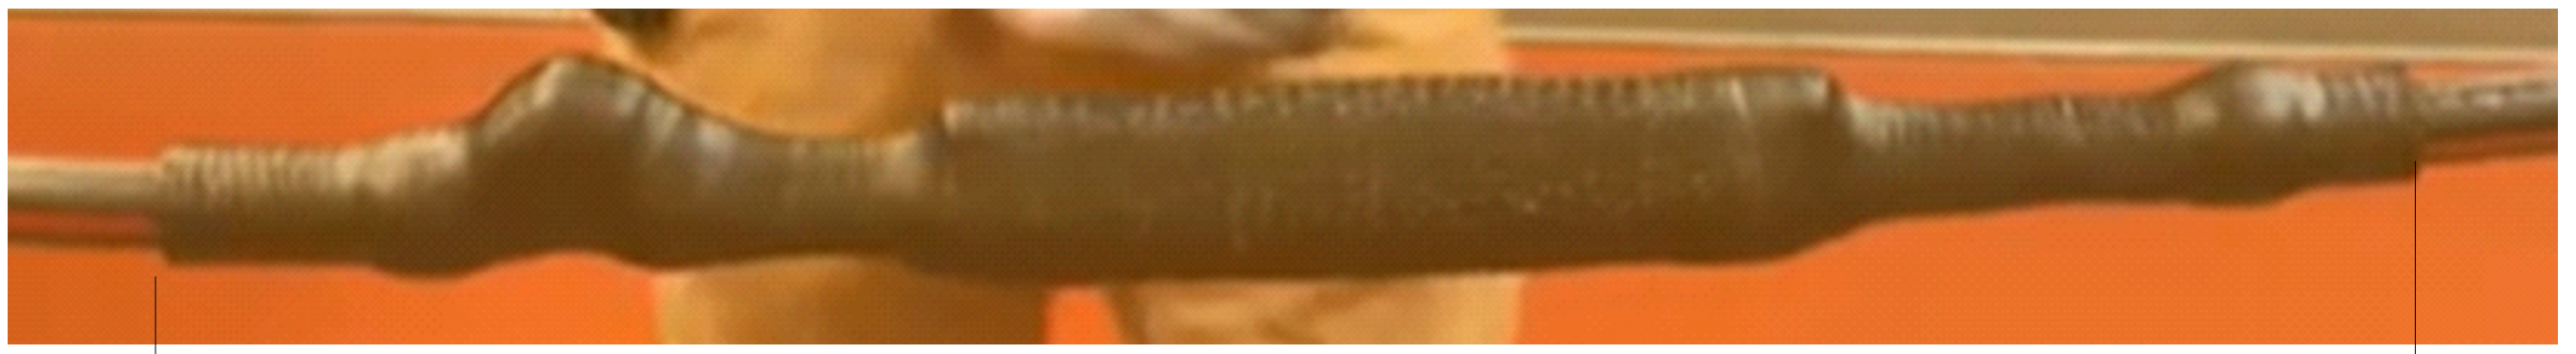



INSTALLATION LENGTH
22.44 [570]

CSJU splice is complete.



INSTALLATION LENGTH
22.44 [570]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 02MAR2022 SATHISH KUMAR G	 TE Connectivity Ltd.	
DIMENSIONS: INCHES [mm]		CHK 02MAR2022 RAMÓN SÁNCHEZ		
		APVD 02MAR2022 RAMÓN SÁNCHEZ	NAME CSJU Cold Applied Joint CSJU-FINAL ASSEMBLY (SIZE: 12 mm)	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	RESTRICTED TO	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC	SIZE	CAGE CODE
MATERIAL		WEIGHT	A3	00779
FINISH		CUSTOMER DRAWING	DRAWING NO G-0147-CSJU	
		SCALE	SHEET	REV
		NTS	2 of 3	1

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

Selection information: Dimensions in inches (millimeters)

CSJU WITHOUT CONNECTOR



Voltage Class	Catalog Number	Nominal Cable Range	Min - Max Insulation Diameter	Max. Jacket O.D.	Connector Dimensions	
					Max. O.D.	Max. Length
15 kV	CSJU-1511	#2 - 4/0	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)	1.00 (25.4)	3.25 (82.5)
25 kV	CSJU-2511	#1 - 2/0	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)	1.00 (25.4)	3.25 (82.5)

CSJU WITH ALUMINUM SHEAR BOLT CONNECTOR

Voltage Class	Catalog Number	Nominal Cable Range	Min - Max Insulation Diameter	Max. Jacket O.D.
15 kV	CSJU-1511-SB1	#2 - 1/0	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-SB2	#2 - 4/0	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
25 kV	CSJU-2511-SB1	#1 - 1/0	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)
25 kV	CSJU-2511-SB2	#1 - 2/0	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)

CSJU WITH ALUMINUM COMPRESSION CONNECTOR

Voltage Class	Catalog Number	Nominal Cable Range	Min - Max Insulation Diameter	Max. Jacket O.D.
15 kV	CSJU-1511-ALC0	#2 STR-SOL, #1 SOL	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC1	#1 STR-CPT, 1/0 CPT-SOL	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC2	1/0 STR-CMPR, 2/0 CPT	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC3	2/0-STR-CMPR, 3/0 CPT	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC4	3/0 STR-CMPR, 4/0 CPT	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC5	4/0 STR-CMPR	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
25 kV	CSJU-2511-ALC0	#2 STR-SOL, #1 SOL	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)
25 kV	CSJU-2511-ALC1	#1 STR-CPT, 1/0 CPT-SOL	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)
25 kV	CSJU-2511-ALC2	1/0 STR-CMPR, 2/0 CPT	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)
25 kV	CSJU-2511-ALC3	2/0-STR-CMPR, 3/0 CPT	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 02MAR2022 SATHISH KUMAR G	 TE Connectivity Ltd.			
DIMENSIONS: INCHES [mm]		CHK 02MAR2022 RAMÓN SÁNCHEZ				
		APVD 02MAR2022 RAMÓN SÁNCHEZ	NAME CSJU Cold Applied Joint CSJU-FINAL ASSEMBLY (SIZE: 12 mm)			
MATERIAL		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		APPLICATION SPEC	A3	00779	C-0147-CSJU	-
		WEIGHT	CUSTOMER DRAWING		SCALE	SHEET
					NTS	3 of 3
						REV 1